


How to update radio stations from 3000 to more than 10000 Stations + Podcasts by Web Interface

1. Preparation work

Please make sure your PC and your DR 440 i are using the same local area network. Copy the new firmware file (with the .bcd extension) to a location where you can browse from your PC.


2. Write down the local IP of your DR 440 i

Boot up the DR 440 i, select “**Configuration**” in home menu, and then go into **Device Status**, you will see the **local IP address** in this menu:

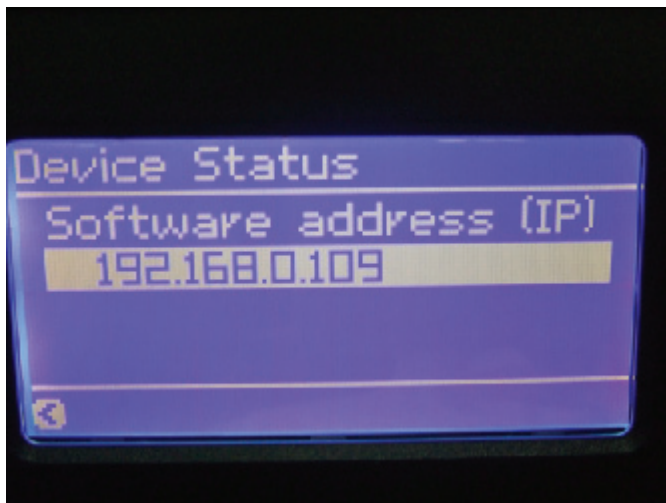


3. Update the F/W by Web Interface

- 1) Open an Internet Explorer (IE) window on your PC, type the local IP address of DR 440 i at the web address area of the IE browser, and then you will see a web interface of the radio (Picture 1):

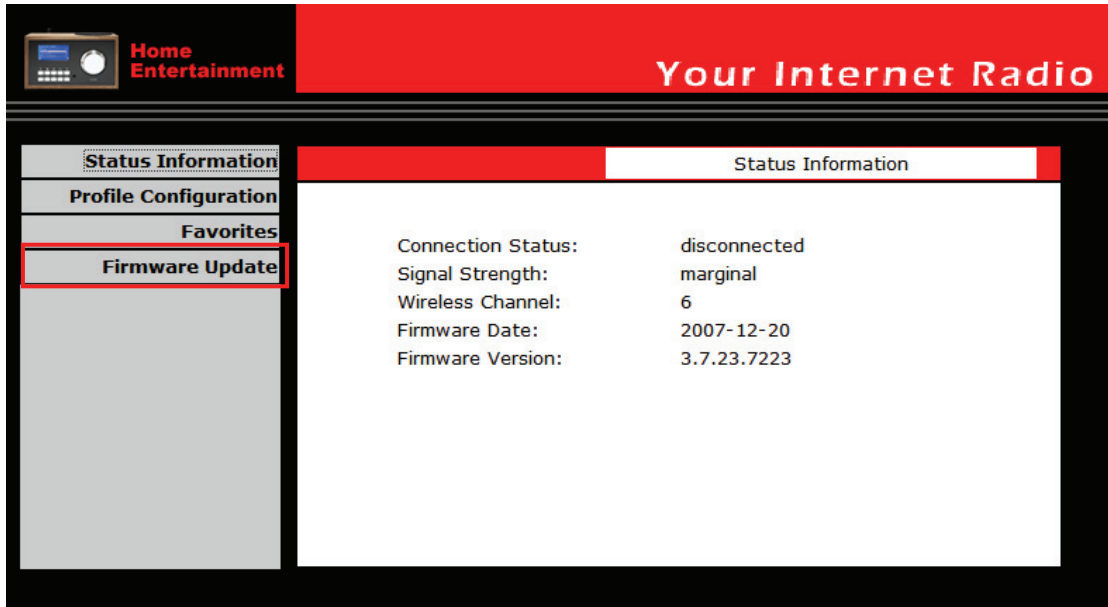


Picture 1

- 2) Click "Firmware Update", the current firmware release version of DR 440 I will be shown on the page (Picture 2).

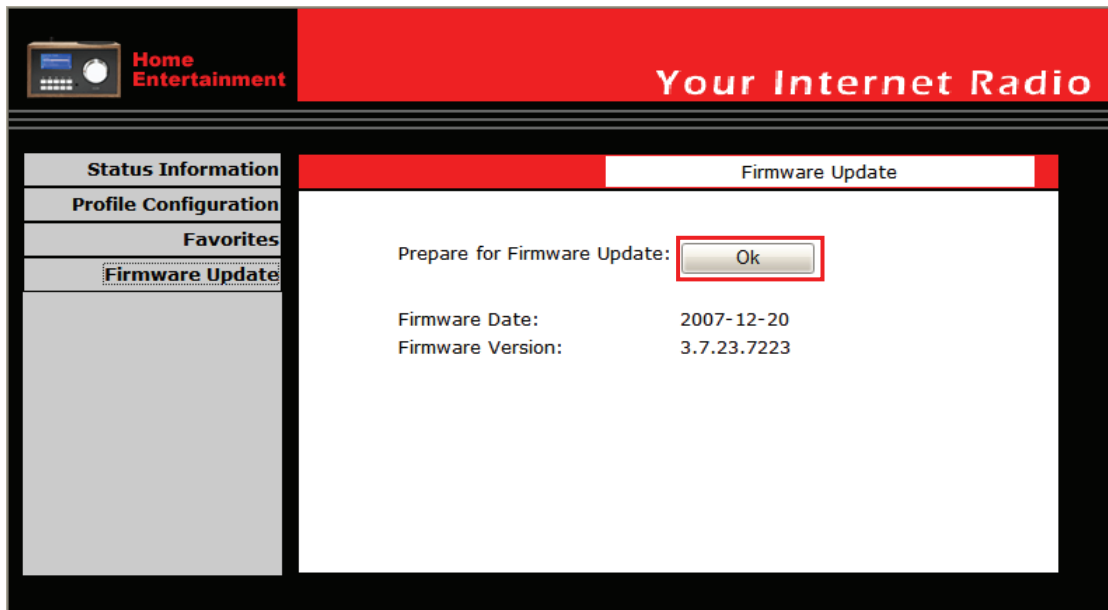


Picture 2

- 3) DR 440 i will reset automatically after you click "OK" button, and the web interface will go into the loading files page (Picture 3):

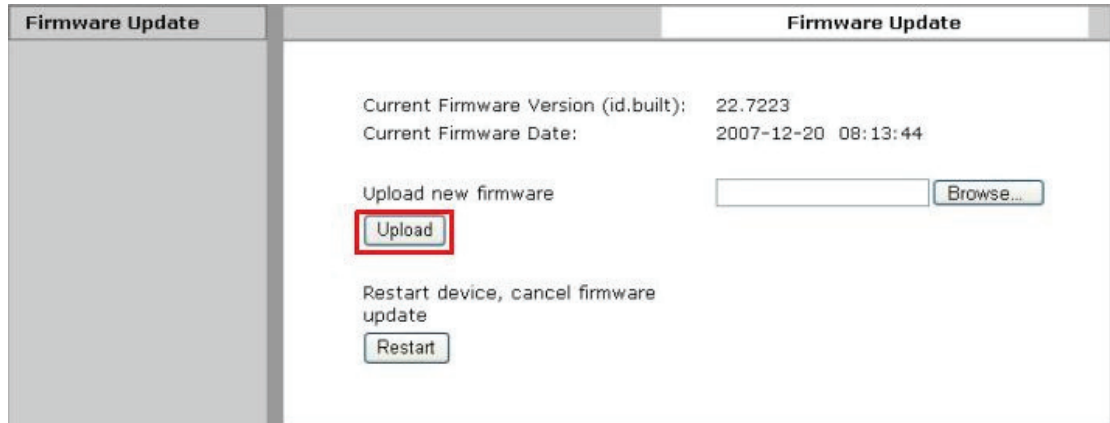

Picture 3

- 4) Using the Browse button to locate the new firmware file from our server (it must have a “.bcd” extension). Load the .bcd file and click the “Upload” button. After you click the “OK” button on next page (picture 4), the DR 440 i will update the device with the new firmware. Once started, the upload process cannot be interrupted or aborted.

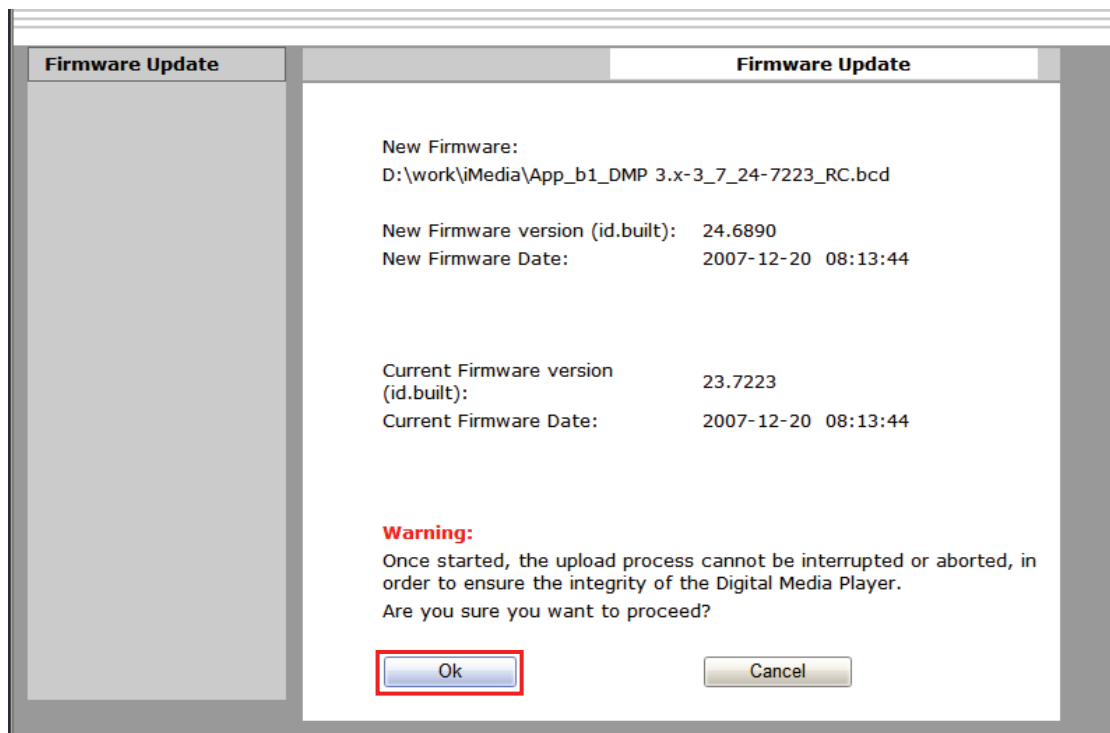

Picture 4

- 5) After you have successfully updated the device with the new firmware, the DR 440 i will reset automatically. Any existing setup like language selection, local IP address, etc., will be replaced by the default parameters. Therefore, you will need to change the default parameters again with your own preference. Once you have completed your own settings, you should be able to reach more than 10000 internet radio stations + Podcasts from different countries.